



Application: Wooden flooring underlay

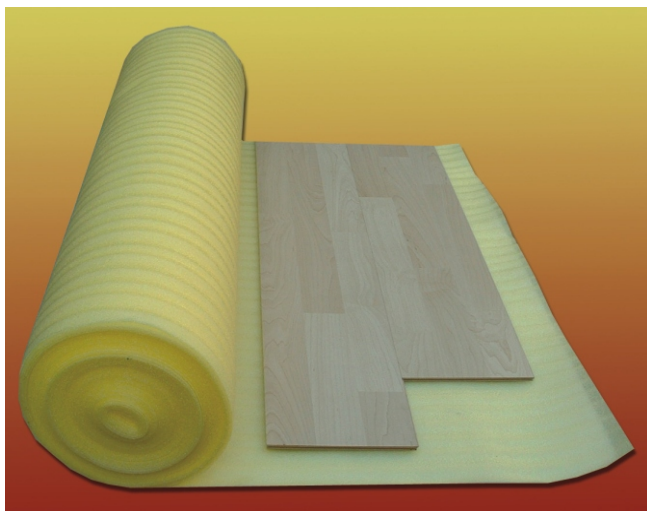

YELOfon STD2 and **STD3** foam rolls are both strong and easy to cut with a sharp knife or scissors and are the ideal cushioning and equalisation underlay for all types of wooden flooring.

Underlay thickness	Roll size	Coverage Per roll	Coverage Per pack
2mm	1m x 25m	25m ²	4 rolls-100m ²
3mm	1m x 20m	20m ²	4 rolls-80m ²

Application: Concrete curing blanket and thermal insulation roll

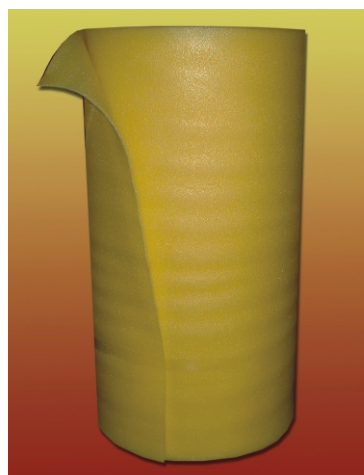

Collecta PE STD10 foam rolls are strong, tough and easy to cut to size with a sharp knife or scissors, its can be used as a re-useable concrete curing blanket or as a thermal insulation under floating screeds.

Foam thickness	Roll size	Coverage Per roll	Thermal conductivity
10mm	1.5m x 50m	75m ²	0.045W/mK

Collecta can hot wire cut both **YELOFOAM X & YELOfon** into strips to suit individual requirements.

Extruded polystyrene strip sizes

Grade of XPS	Thickness of XPS	Minimum width of strip	Maximum width of strip
X2	20 - 100mm	10mm	600mm
X3	30 - 160mm	10mm	600mm
X4	30 - 160mm	10mm	600mm
XES	20 - 100mm	10mm	600mm
XR	5 - 150 mm	5mm	600mm

Length of strip
X2, X3, XES: 2500mm
X4: 1250mm
XR: 300 - 2500 in 50mm increments

Extruded polyethylene strip sizes

Thickness of PE foam	Minimum width of strip	Maximum width of strip
2mm	30mm	1000mm
3mm	30mm	1000mm
5mm	20mm	1500mm
10mm	15mm	1500mm

Lengths available - 2mm: 25m, 3mm: 20m, 5mm: 75m, 10mm: 50m

