


Suspended floor (other than ground floor)

Insulation installed below floating screed

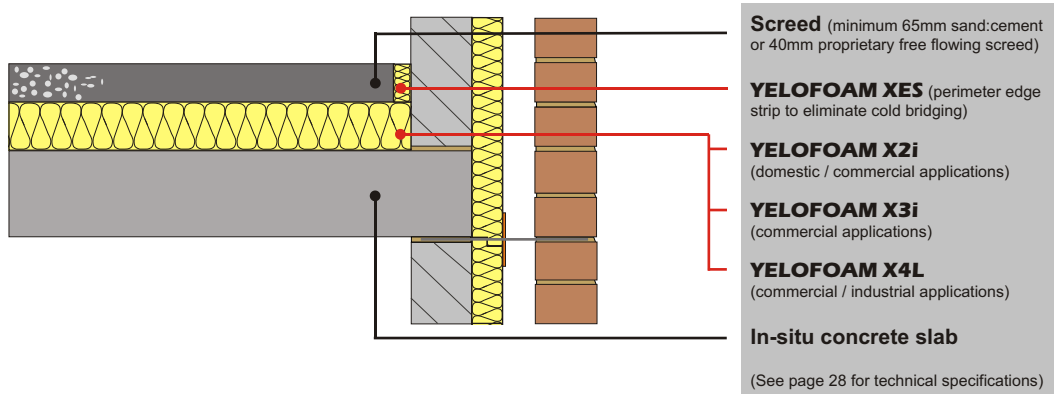

Thickness of concrete slab (mm)	Typical thickness of insulation req'd (mm)				
300	90	120	120	160	100 +60
200	100	120	120	160	100 +60
150	100	120	140	160	100 +60
	0.25	0.22	0.20	0.18	0.16
	U-value (W/m²K)				
	<small>Calculated in accordance with ISO 15370</small>				

Fig. 11