


DECKfon[®] 17T, 26T & 30T

Composite Acoustic Overlay Floorboards for Refurb and Conversion Applications

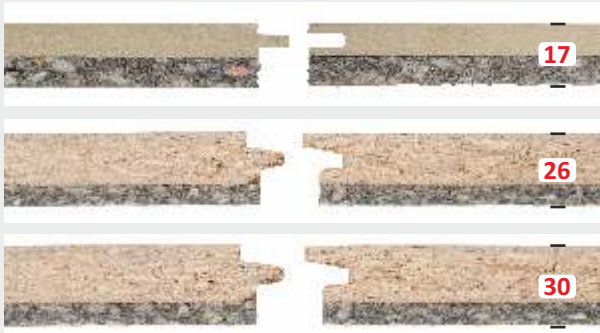

Product Information

DECKfon composite overlays are the ideal acoustic treatment to improve the performance of an existing structural timber decked floor. All three treatments combine a tongue and groove timber floorboard with a low resonance, flexible resilient foam.

Product Benefits

- Excellent acoustic performance
- Three thickness' available: 17, 26 & 30mm
- Moisture resistant T & G floorboard
- Recycled resilient layer
- Quick and easy to install

Technical Information

		DECKfon		
		17T	26T	30T
Product description	-	Acoustic overlay floorboard	Acoustic overlay floorboard	Acoustic overlay floorboard
Overall thickness	mm	17	26	30
Type of facing board	-	9mm MR MDF	18mm P5 Chipboard	22mm P5 Chipboard
Resilient layer	-	8mm open-cell PU foam	8mm open-cell PU foam	8mm open-cell PU foam
Board dimensions	mm	600 x 2400	600 x 2400	600 x 2400
Weight	kg/m ² kg/roll	7.45 10.74	13.40 19.29	16.20 23.32
Associated flanking strip required	-	YELOfon FS15	YELOfon FS30	YELOfon FS30

Third Party Accreditation and Approvals



ISO 9001: 2015

Environmental Credentials



01634 29-66-77



collecta.co.uk



technical@collecta.co.uk