


HEXATHERM[®] XMD

Inverted roof up-stand insulation

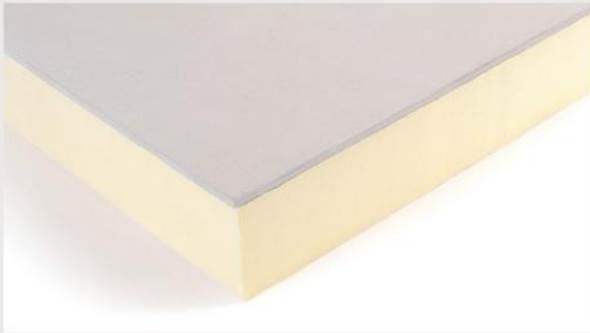


Product Information

CELLECTA's XMD boards combines the benefits of a high performance HEXATHERM extruded polystyrene with a high impact facing board to produce the ideal treatment to protect inverted roof vertical up-stands.

Key Benefits

- ⬢ Smooth high impact facing
- ⬢ Attractive grey facing
- ⬢ Excellent life-long thermal performance
- ⬢ Easy to install
- ⬢ Very low water absorption

Technical Information

		XMD
Thermal Conductivity EN 12667	W/mK	0.033 ≤80mm 0.034 >81mm
Strength at 10% compression EN 826	kPa	300
Temperature range	°C	-50/+75
Long term water absorption by immersion EN 12087	%	>0.7
Board size	mm	1200 x 2400
Thickness' available - including 6mm high impact facing (other sizes manufactured to order)	mm	56, 66, 81, 86, 106, 126, 146, 166
Edge profile	-	 Square

Third Party Accreditation and Approvals



Environmental Credentials



01634 29-66-77



collecta.co.uk



technical@collecta.co.uk