



CELLECTA UNICLOSER X proprietary thermal cavity closers
Suitable for both full and partial fill cavity walls

Vertical jamb detail UNICLOSER X Double Standard

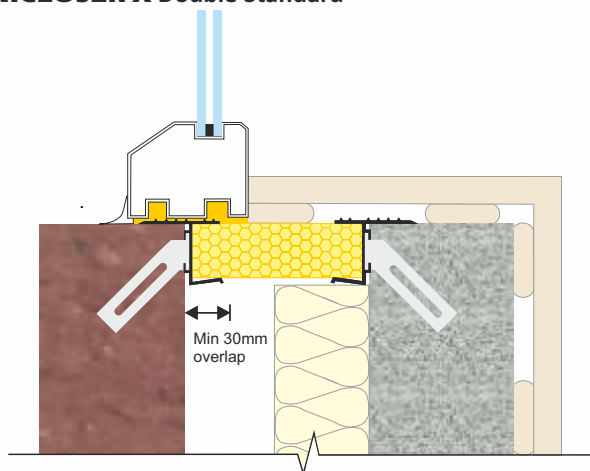

WT9.xcc1

Horizontal sill detail UNICLOSER X Double Standard

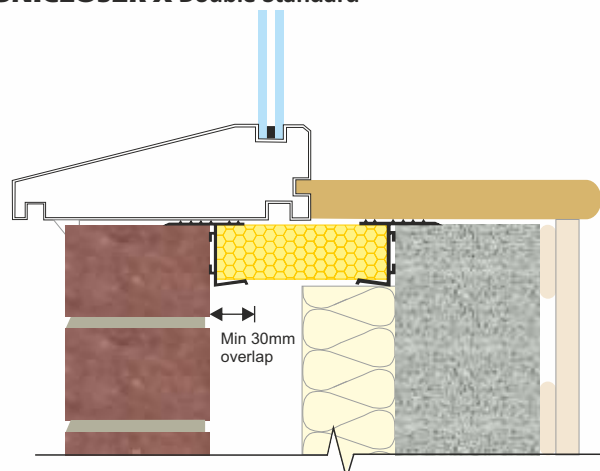

WT9.xcc2

Product Information

UNICLOSER X

CELLECTA's UNICLOSER X combines the benefits of a **HEXATHERM** extruded polystyrene with one or two U-PVC damp proof course profiles to produce a rigid cavity closer that eliminates cold bridging around window and door openings.

Key Benefits

- ⬢ Effective rigid DPC
- ⬢ Eliminates cold bridging around window and door returns
- ⬢ Compatible with full and partial fill cavity insulation
- ⬢ Quick and easy to install

Physical Properties

		UNICLOSER X	
		Standard	Double Standard
Thermal Conductivity EN 12667	W/mK	0.033	0.033
Number of rigid DPC profiles	-	1	2
Closer length	mm	2500	2500
Standard widths (other sizes manufactured to order)	mm	75, 100, 125	75, 100, 125, 140, 150, 175, 200
Profile(s) detail	-		
Number of fixings required per length		 6 "Universal fixings"	 12 "Wall ties"

Third Party Accreditation and Approvals



ISO 9001 N° 10224



BE 009119-1



Environmental Credentials



Standard-Fixed to the frame and built in



Standard-Retro fitted



Double Standard-Retro fitted



01634 29-66-77



collecta.co.uk



technical@collecta.co.uk