

CELLECTA Mojave® acoustic / UFH floating floor system laid on timber sub-deck  
Use with timber frame walls only

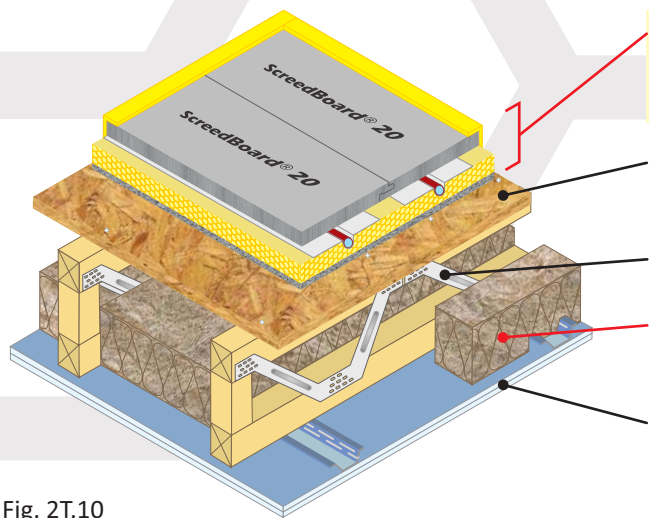


Fig. 2T.10

## Acoustic + UFH treatment

CELLECTA Mojave® S1/8 acoustic treatment incorporating underfloor heating (see Table 2T.10a for full details)

## Floor decking

15mm<sup>(1)</sup> (min) thick wood based board, density 600kg/m<sup>3</sup> (min)

## Joists

253mm<sup>(1)</sup> (min) metal web joists

## Absorbing material

- 50mm CELLECTA FIBREfon® Micro 50
- 100mm (min) quilt insulation (10-36kg/m<sup>3</sup>)

## Ceiling

See Table 2T.10b for ceiling treatment options featuring 30mm deep CELLECTA HP30 resilient bars

<sup>(1)</sup>18mm (min) required for Robust Detail applications



**FASTRACKCAD**  
ARCHITECTURAL CAD DATABASES

Available on  
bimstore.co

**NBSPlus**

Table 2T.10a

Table 2T.10b

## Installation Details

### Resilient overlay platform floor system incorporating underfloor heating

#### CELLECTA Mojave® S1/8

Dry laid acoustic treatment incorporating underfloor heating system

#### 1 ScreedBoard® 20

High conductivity overlay board  
Dimensions: 20mm x 600mm x 1200mm  
Weight: 25kg/m<sup>2</sup> / 18.00kg/board  
Thermal resistance: 0.05m<sup>2</sup>K/W

#### A CELLECTA Pro Adhesive

ScreedBoard joint adhesive  
Bottle size: 1L / 33m<sup>2</sup> coverage

#### 2 ULTRAplate

Aluminium heat diffuser plate (to suit pipe installed)  
Dimensions: 130mm x 1000mm

#### 3 XFLO® 250, 300, 500 (kPa)

High compressive strength routed XPS insulation  
Dimensions: 15-75mm x 600mm x 2500mm  
Pipe centre: 150, 200, 300mm  
Pipe bore size (OD): 10 - 20mm (manufactured to suit)


#### 4 FIBREfon® 8

High performance resilient layer  
Dimensions: 8mm x 600mm x 1200mm  
Weight: 1kg/m<sup>2</sup> / 0.72kg/board


#### 5 YELOfon® ES5/100

Perimeter edge strip  
Dimensions: 5mm x 100mm x 50m

#### P UFH water pipe (by others)

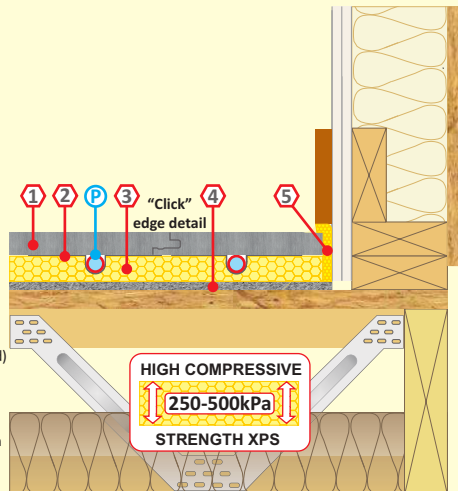

Screedboard 20 is 5x more thermally conductive than an 18mm chipboard + 19mm plasterboard plank combination, enabling the underfloor heating system to be more responsive and the heat source to run more efficiently at a lower temperature.

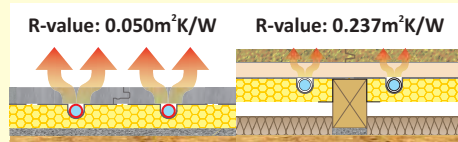

## Ceiling Treatment Options

Ceiling boards must not penetrate or touch joists


16mm (min) metal resilient bars mounted at right angles to the joists at 400mm centres.

CT1 Two layers of gypsum-based board, composed of 19mm (nominal 13.5kg/m<sup>2</sup>) fixed with 32mm screws and 12.5mm (nominal 10kg/m<sup>2</sup>) fixed with 42mm screws, with all joints staggered.

CT2 Two layers of gypsum-based board, composed of 15mm (nominal 12.5kg/m<sup>2</sup>) fixed with 25mm screws and a second layer of 15mm (nominal 12.5kg/m<sup>2</sup>) fixed with 42mm screws, with all joints staggered.

#### Plus sacrificial ceiling

Metal ceiling system with a 150mm (min) void fixed to underside of primary ceiling. One layer of nominal 8kg/m<sup>2</sup> gypsum based board.

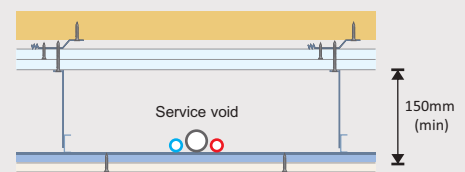

CT3 - 30mm CELLECTA HP30 resilient bars mounted at right angles to the joists at 600mm (max) centres.

Two layers of gypsum-based board, composed of 15mm (nominal 12.5kg/m<sup>2</sup>) fixed with 25mm screws and a second layer of 15mm (nominal 12.5kg/m<sup>2</sup>) fixed with 42mm screws, with all joints staggered.



Additional items required:

CELLECTA ScreedBoard fixing tools

## Acoustic Performance

<b>Airborne:</b>	<b>54dB <math>D_{nT,w} + C_{tr}</math></b>
<b>Impact:</b>	<b>55dB <math>L_{nT,w}</math></b>

<b>Building Regs</b>
<b>+ 5dB</b>

Values quoted are typical and based on the treatment being installed correctly and pre-completion tested (PCT).  
Airborne performance tested in accordance with BS EN ISO 140-4:1998  
Impact performance tested in accordance with BS EN ISO 140-7:1998

## Third Party Accreditation and Approvals



## Environmental Credentials



01634 29-66-77



cellecta.co.uk



technical@cellecta.co.uk