

CELLECTA DECKfon® Batten 70 acoustic treatment laid on timber sub-deck  
Use with timber frame walls only

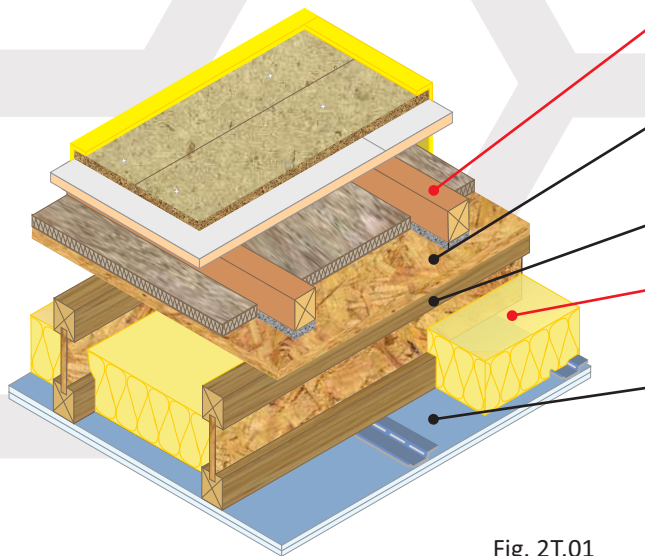


Fig. 2T.01

<b>Floating floor treatment</b>	<b>FFT1 - CELLECTA DECKfon® Batten 70<sup>(1)</sup></b> (See Table 2T.01a & b for full details)
<b>Floor decking</b>	15mm (min) thick wood based board, density 600kg/m <sup>3</sup> (min)
<b>Joists</b>	235mm <sup>(2)</sup> (min) timber I-joists
<b>Absorbing material</b>	<ul style="list-style-type: none"> <li>50mm CELLECTA FIBREfon® Micro 50</li> <li>100mm (min) quilt insulation (10-36kg/m<sup>3</sup>)</li> </ul>
<b>Ceiling</b>	See Table 2T.01c for ceiling treatment options <sup>(1)</sup> DECKfon Batten 80 required for V-FT-1 applications <sup>(2)</sup> 240mm (min) required for V-FT-1 applications

**FASTRACKCAD**  
ARCHITECTURAL CAD DATABASES

Available on  
**bimstore.co**

**n55Plus**

Tables 2T.01a & b


## FFT1 Resilient composite deep batten system

### 1 DECKfon® Batten 70

Deep acoustic batten: 75mm x 45mm x 2400mm  
\*Height indicated when floor is loaded to 25kg/m<sup>2</sup>

### 2 YELOfon® ES5/120

Perimeter edge strip: 5mm x 120mm x 50m

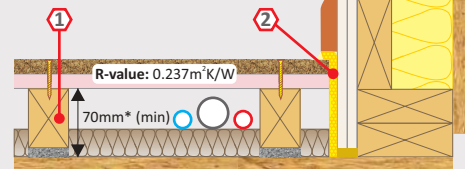

Additional components required to complete treatment:

- 18mm (min) tongue & groove flooring board
- Gypsum-based board nominal 13.5kg/m<sup>2</sup>
- Sound absorbing quilt laid between batten:
  - 15mm CELLECTA FIBREfon Micro 15 non-itch polyester quilt
  - 25mm (min) 10-33kg/m<sup>3</sup> or 13mm (min) 33-36kg/m<sup>3</sup> mineral wool

<b>Airborne</b>
55dB $D_{nT,w} + C_{tr}$
$rd \Delta R_w = 19dB$
<b>Impact</b>
54dB $L_{nT,w}$
$rd \Delta L_w = 16dB$
<b>Building Regs</b>
>+5dB
<b>BBA VERIFIED RD DATA</b>

## FFT1 Resilient composite deep batten system incorporating UFH

### 1 HiDECK® Structural 25<sup>(1)</sup>


### A CELLECTA Pro Adhesive

### 2 DECKfon® Batten 70

### 3 XFLO® JB-FF foil faced XPS insulation brd

### 4 YELOfon® ES5/120 edge strip

### P UFH water pipe (by others)

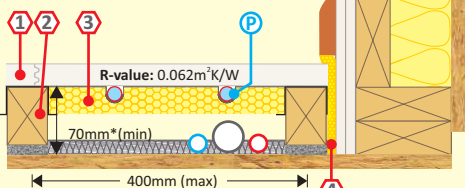

Additional items required to complete treatment:

- Sound absorbing quilt laid between battens:
  - 15mm CELLECTA FIBREfon Micro 15 non-itch polyester quilt
  - 25mm (min) 10-33kg/m<sup>3</sup> or 13mm (min) 33-36kg/m<sup>3</sup> mineral wool

<b>Airborne</b>
54dB $D_{nT,w} + C_{tr}$
$rd \Delta R_w = 18dB$
<b>Impact</b>
54dB $L_{nT,w}$
$rd \Delta L_w = 16dB$
<b>Building Regs</b>
>+5dB
<b>CLASS A1</b>

Table 2T.01c

## Ceiling Treatment Options


Ceiling boards must not penetrate or touch joists

16mm (min) metal resilient bars mounted at right angles to the joists at 400mm centres.

### Ceiling treatment


**CT1**-Two layers of gypsum-based board, composed of 19mm (nominal 13.5kg/m<sup>2</sup>) fixed with 32mm screws and 12.5mm (nominal 10kg/m<sup>2</sup>) fixed with 42mm screws, with all joints staggered.

**CT2**-Two layers of gypsum-based board, composed of 15mm (nominal 12.5kg/m<sup>2</sup>) fixed with 25mm screws and a second layer of 15mm (nominal 12.5kg/m<sup>2</sup>) fixed with 42mm screws, with all joints staggered.

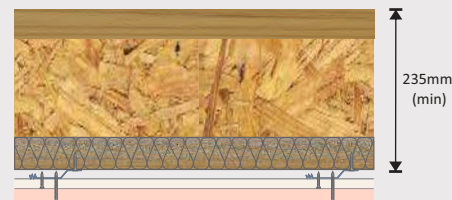

### Sacrificial ceiling (optional)

Metal ceiling system with a 75mm (min) void fixed to underside of primary ceiling. One layer of nominal 8kg/m<sup>2</sup> gypsum based board.

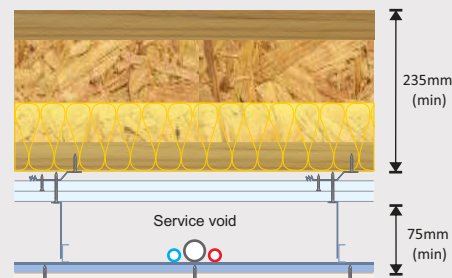

Sound absorbing quilt fitted between joists

- 50mm CELLECTA FIBREfon Micro 50
- 100mm (min) mineral wool quilt -10-33kg/m<sup>3</sup>

## Acoustic Performance

$rd$  impact performance values quoted were conducted at Sound Research Laboratories (UKAS ref. 0444) in accordance with BS EN ISO 10140-3 and BS EN ISO 10140-4 and rated in accordance with BS EN ISO 717-2:2013. Airborne performance tested in accordance with BS EN ISO 10140-2 and BS EN ISO 10140-4 and rated in accordance with BS EN ISO 717-1: 2013 as detailed in Appendix C of the Robust Details hand book (minimum value required  $rd \Delta R_w + C_{tr} = 13dB$   $rd \Delta L_w = 15dB$ ). PCT values quoted are typical, based on the treatment being installed correctly and pre-completion tested, with airborne performance tested in accordance with BS EN ISO 140-4:1998 and impact performance tested in accordance with BS EN ISO 140-7: 1998.




# Batten system floating floor treatment design & installation details (FFT1)


The acoustic performance of the floor will be compromised if the floating floor treatment is not completely isolated from the structural slab, soil pipes, door frames, the surrounding walls and their treatments. To address this risk, each potential problem area needs to be detailed accordingly.

**Chipboard + plasterboard plank covered floor**

**CELLECTA HIDECK® Structural covered floor**

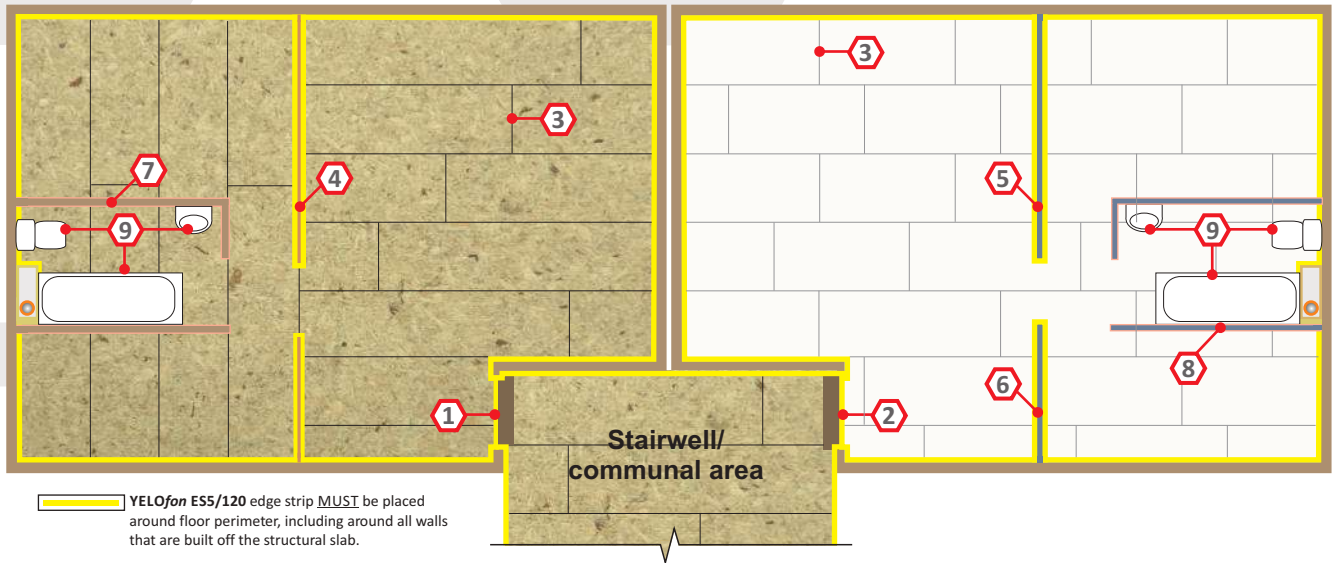


**1 Door threshold - Chipboard + Plasterboard plank**

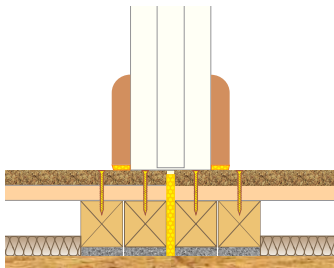


Double up battens each side of the door threshold to provide additional support. Refer to Part B and Section 2 for fire safety regulations.

**2 Door threshold - HiDECK Structural**

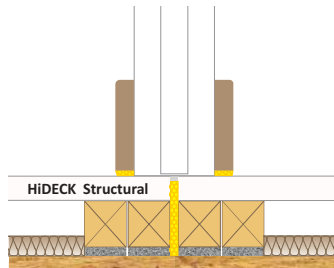


Leave a 5mm (min) gap between the habitable area treatment and the communal area treatment.

**3 Joining floorboards**

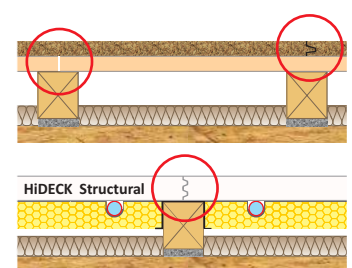


All floorboards must be laid in a staggered formation, with end joints meeting on a **DECKfon Batten** and be bonded together with appropriate adhesive.

**4 Load-bearing timber stud partition built off the structural floor**

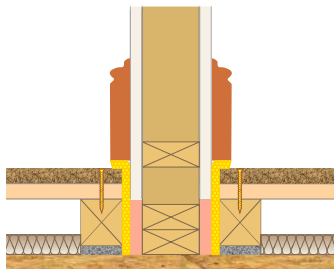


Lightweight internal walls built off the structural floor must be isolated from the floating floor treatment with **YELOfon ESS/120 edge strip**.

**5 Load-bearing timber stud partition built off the structural floor**

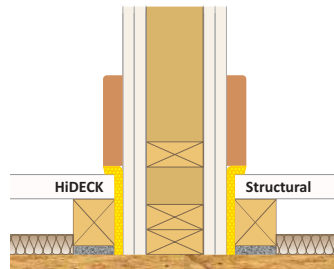


Where required, lightweight internal walls must meet Building Regulation Requirement E2.

**6 Floor treatment + UHF - timber stud partition built off structural floor**

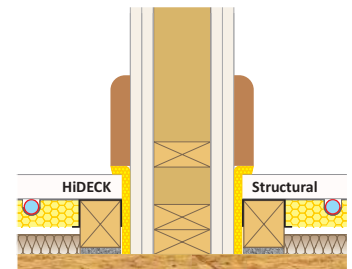


**7 Timber stud partition built off FFT1**

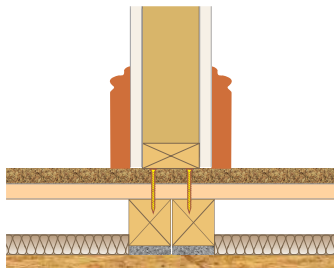


Double up battens under internal non-load bearing walls.

**8 Metal frame partition built off FFT1**

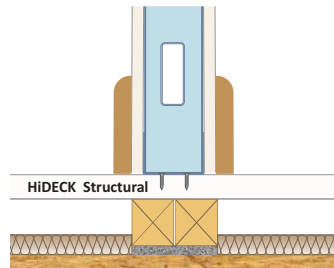

Double up battens under internal non-load bearing walls.

**9 Bath surrounds and sanitary ware**

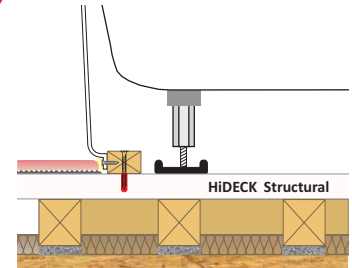

Under sanitary ware areas, battens should be laid in a 300mm x 300mm grid formation.



01634 29-66-77



cellecta.co.uk



technical@cellecta.co.uk