


XFLO® Micro TB

Low Profile, High Compressive Strength UFH Floorboards with Tiling Membrane

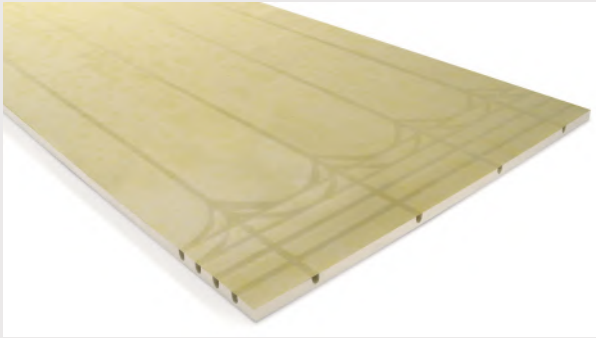

Product Information

XFLO® Micro TB boards are a patent pending, low profile, routed under floor heating insulation board with a unique facing membrane, that enables floor tiles to be directly adhered. The board's ultra high compressive strength enables it to withstand the rigours of both domestic and commercial applications.

Product Benefits

- Low profile, as thin as 15mm
- Ultra high compressive strength - 500kPa
- Manufactured to suit pipe and centres required
- Able to directly accept floor tiles
- Patent pending

Technical Data

		XFLO® Micro TB
Product description	-	Tile membrane faced, low profile, ultra high compressive strength UFH board
Strength at 10% compression	kPa	500
Thermal conductivity	W/mK	0.035
Temperature range	°C	-50/+75
Route sizes available (to suit pipe diameter)	mm	10, 12, 15, 16
Pipe centres	mm	150
Board size	mm	600 x 1200
Thickness'	mm	15, 18, 20, 25

Third Party Accreditation and Approvals



Environmental Credentials

